



AUS GUTEM GRUND

ARDEX B 14

32,5 R-SF,
- Z-3.12-1206

ARDEX B 14

ARDEX E 100,

5014/0140 11.06.1990 ..

„iBMB“, .




Reg.No.3/344

QM -

DIN EN ISO 9001

ARDEX GmbH
D- 58430 Witten · Postfach 61 20
Tel.: +49 (0) 23 02/664- 0
Fax: +49 (0) 23 02/664-240
kundendienst @ ardex.de
www.ardex.de

ARDEX B 14

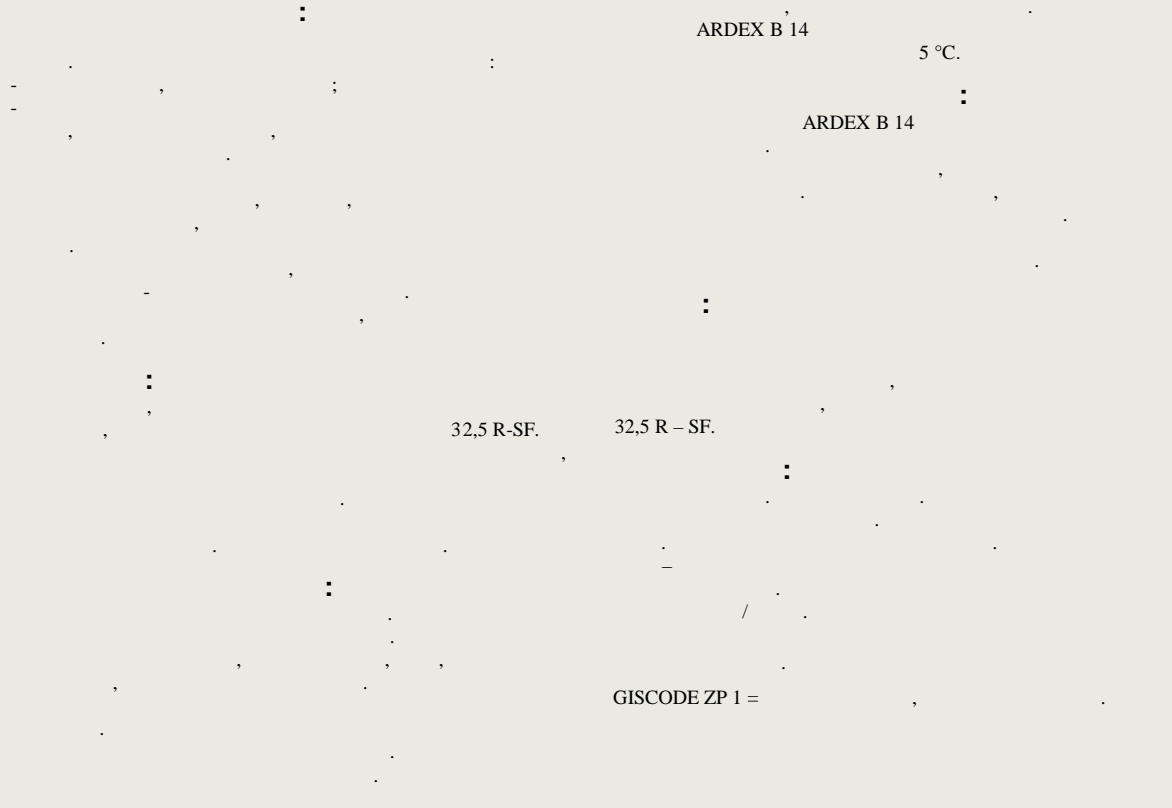

GISCODE ZP 1 =

ARDEX:

. 6,25	25	ARDEX B 14	
			25
ARDEX B 14	1	. 6,25	ARDEX E 100 + 2
			5
	18-20° C		
	90		
ARDEX B 14.			
	5	ARDEX B 14	
()			
	0-1	1,0 . . .	0,3 . . .
	0-4	1,0 . . .	0,5 . . .
	4-8	1,0 . . .	1,0 . . .

ARDEX B 14

3 %

ARDEX B 14.

:	. 6,25	: 25	
:	. 1 . . .	: 3 1/4 . . .	
:	. 1,2 /		
:	. 1,9 /		
:	. 1,4	2	
(20 °C):	. 30		
:	7	- . 15 / 2	
:	28	- . 20 / 2	
:	7	- . 4 / 2	
:	28	- . 7 / 2	
pH:	. 12		
:			
:		25	
:		25	
:			. 12